


HANSER

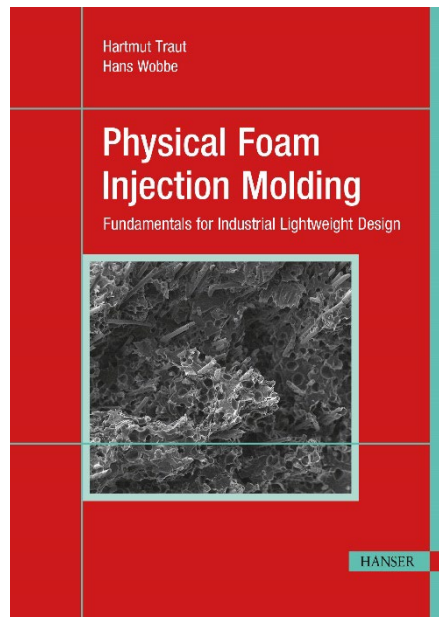

Sample Pages

Physical Foam Injection Molding

Hartmut Traut und Hans Wobbe

Print-ISBN: 978-1-56990-941-6

E-Book-ISBN: 978-1-56990-283-7

E-Pub-ISBN: 978-1-56990-383-4

For further information and order see

www.hanserpublications.com (in the Americas)

www.hanser-fachbuch.de (outside the Americas)

© Carl Hanser Verlag, München



Preface

The industrial injection molding process is dominated by compact injection molding, despite the wide variety of special processes available. Of these, one process, the foaming of plastics, is coming into focus due to its potential as a driving force of the lightweight design megatrend.

This involves the chemical and physical foaming of plastics. The latter, physical foaming, is of greater importance in the range of applications today. However, this was not always the case. Based on a patent from MIT (Massachusetts Institute of Technology), physical foaming became widespread only since the late 1990s/early 2000s through the global manufacturers of injection molding machines. The interested machine manufacturers concluded contracts with the patent holder – Trexel Inc., USA – and started marketing the technology. Both main authors of this book remember these beginnings well, as they both were involved in contract signings.

Today, physical foam injection molding is on the threshold of becoming another standard process alongside the established compact injection molding process. The focus of our considerations is therefore on answers to the questions that have so far stood in the way of this goal: Why has physical foam injection molding not become more widely accepted, even though there are already so many outstanding example applications that speak in favor of this technology?

As with the introduction of all new innovative technologies, investments are also necessary for foam injection molding. However, we are not thinking here of the necessary machine equipment for production. We would rather leave the monetary evaluation of comparing the manufacturing costs using compact injection molding with those using the foam molding process to the businessperson.

We are thinking of investments in the training of product designers responsible for the part design suitable for foam injection molding, investments that are necessary to create appropriate guidelines and standards, and investments to register and publish specific material data. If you ask the universities responsible for research and train-

ing about this, the answer is always: “*The process has been developed, what are you waiting for? Now the ball is in the industry’s court!*” With the questions formulated above, we are obviously in an unresolved “gray area” between engineering science and industry. But isn’t engineering science closely intertwined with industry, and should they not seek dialogue with each other? This is obviously less the case with our topic.

We as authors have therefore initiated Guideline 2021 (“Thermoplastic foam injection moulding”) at the VDI (The Association of German Engineers), which was published in May 2023, and with this book we also want to make a contribution to the design guidelines that have been missing up to now. The last missing area of material data sheets is also discussed. Frankly, however, this is the last missing link to the breakthrough of foam injection molding as a second standard process, since few impulses for solving the problem come from the material manufacturers who are actually responsible. In concrete terms, this means that there is a lack of material data without which no part designer can make detailed calculations. Molders who consistently and uncompromisingly enter the technology of foam injection molding must therefore currently invest their own work with regard to the material question. However, a competitive advantage will be the reward.

This book, with its broad presentation of all important topics, is intended not only as an important guide for the beginner, but also as an aid to the advanced user of foam injection molding in dealing with current problems.

The main authors would like to express their special thanks to the other co-authors on their individual contributions, for their willingness to cooperate and for their perseverance and patience during the long development phase of this book project. In particular, we would like to take this opportunity to thank Mr. Roger Kaufmann, who actively supported us with his pure expert knowledge of the important areas of process simulation application and mold design and development. Furthermore, the authors are deeply indebted to the staff of Carl Hanser Verlag for their helpfulness and generous support in coordinating the work at the publishing house. Another big thank you goes to Ms. Angelika Wobbe, who not only had to hold the threads together, but also took over the careful review and correction of the book chapters and is also responsible for the translation into English.

Hartmut Traut, Siegen, Germany

Hans Wobbe, Hitzacker (Elbe), Germany

Spring 2024



Foreword

What is holding back new technology adoption? Often our personal aversion to risk. The reasons for this may be laziness on the one hand, and on the other hand the application of the familiar, the good old habits. Often, it is simply ignorance. The ignorance regarding opportunities and risks as well as the uncertainty in evaluating them correctly in order to dare to implement. To dare and not to hesitate in order to release beneficial potentials. It is often the same when it comes to using physical foam injection molding technology: “Isn’t it all voodoo?” – Which brings us back to uncertainty, and thus to risk aversion.

But then, it is not that simple. Good solid engineering of products, tools, machines and processes is based not only on the depth of technical knowledge, but also on engineering common sense. In other words, on the valuable wealth of experience of a technical expert, but also on the gut feeling of the specialist. The skillful combination of both is a guarantee for the development of efficient and economical production processes, which are then used to manufacture high-quality products that meet the requirements.

And this is exactly where the work of the authors Traut and Wobbe comes in. The aim of this book is to enlighten, to create trust, and to enable users to go risk-consciously into the implementation. The technology of physical foam injection molding has been around for a good 20 years. At the beginning, it was heavily regulated due to existing patents by the Trexel Company, which meant that the spread of MuCell® on shop floors was correspondingly restrained. Due to this obstacle, the process could only slowly establish itself in the world of plastics. In addition, in the early years, attention was often focused on the general upgrading of the process technology, its implementation possibilities and performance diversity. Now that the process is in place, one might think, it is time to move on to production. However, as is well known, the industrialization of a process technology already begins with product development. You could also say that the process follows the product with its requirements and specifi-

cations, and not the reverse. It always makes sense to first clarify the “*what*” and the “*for what*” before one can think about the “*how*” and the “*by what means*”. Classic, but proven – unfortunately not always put into practice. But that is another topic ...

In order to be able to successfully implement the promising advantages of physical foam injection molding, such as weight reduction, minimization of shrinkage and warpage, and cycle time reduction – to name but a few – it is necessary to take into account and, above all, to realize the special process engineering features early in the product development stage. The classic doctrine of material- or process-oriented design for compact injection molding applies only to a limited extent, or is no longer necessary in the depth of its consequence. In this case, this can be very advantageous, especially with regard to wall thickness variations, sink marks and geometric dimensional accuracy. In short, it must – or rather “*may*” – be designed differently. The same has an effect on the mold design and thus on the mold construction. Here, too, there are special features to be taken into account so that the process can ultimately be successfully applied.

Product, mold and injection molding machine: an inseparable triad that must be harmoniously coordinated to ensure process capability around the clock if necessary. All these topics are discussed, explained and usefully reflected upon in the book, based on the professional competence that the entire team of authors has built up and acquired over many years. Reading this book, it soon becomes obvious that the practical implementation of what is described has a very high priority. Basic knowledge and solution approaches are considered holistically. Advantages and disadvantages are presented and discussed.

At this point, one can only wonder why it has taken so long for such a standard work to be made available to the industry. The “*thirst for knowledge*” is there – finally, it is satisfied.

Thomas Seul, Schmalkalden, Germany

Spring 2024

The Authors

Hans Wobbe



Dr.-Ing. Hans Wobbe switched from compounding to injection molding after holding several management positions in plastics compounding, including head of development at Werner & Pfleiderer GmbH in Stuttgart, Germany.

The combination of both technologies was first developed as a production-ready system for the market under his responsibility as Managing Director Technology at KraussMaffei Kunststofftechnik GmbH, Munich. During his time as Managing Director Technology/Production of the Austrian company Engel Holding GmbH, a special focus was on the development of a complete product range of fully electric injection molding machines. In production, the expansion and construction

of new plants was also stepped up, particularly in Asia (South Korea and Shanghai/China).

In 2010, as an independent management consultant, he founded the partnership Wobbe Bürkle Partner together with Dr.-Ing. Erwin Bürkle, which today operates under the name Wobbe & Partner. Since 2016, he has been a member of the strategy board at Yizumi Precision Machinery in China.

In 2014, he was appointed as Foreign Expert in China by the “State Administration of Foreign Experts Affairs” (SAFEA) and has been “Member of 1000 Thousand Plan” since then.

Hartmut Traut

After completing his vocational training as an industrial sales representative and graduating from a technical secondary school, Dr. Hartmut Traut completed his first degree in business administration. He completed his second degree, in teaching/secondary level II with a vocational specialization, in 1982 and then completed his doctorate as Dr. phil.

In 1987 he founded the company Centro Kontrollsysteme GmbH, Germany, which

to this day develops and manufactures control and sorting systems for the packaging industry, and was its CEO.

After selling the company in 1994, he worked for 8 years as Sales and Marketing Director at Thermo Detection, responsible for Europe, Middle East and Africa. Products included chemical and optical detection systems for the food and beverage industry.

He then served as Trexel's Business Director for Europe for 19 years, most recently as Vice President International Relations. He helped build Europe into Trexel's largest market. The partnerships he established had a major impact on the company's global growth. In recognition of his many years of service and his role in the development of Trexel, the company has awarded him the honorary title of "Vice President Emeritus".

Glossary of Abbreviations

Abbreviation	Definition
AiF	Arbeitsgemeinschaft industrieller Forschungsvereinigungen (German Research Association)
Al	Aluminum
ASA	Acrylonitrile–styrene–acrylate
BLM	Boundary-layer mesh
DIN	Deutsche Industrie Norm (German industry standard)
FEM	Finite element method
Fraunhofer ICT	Fraunhofer Institute for Chemical Technology, Pfinztal, Germany
GKV	Gesamtverband der kunststoffverarbeitenden Industrie (General Association of the Plastics Processing Industry), Berlin, Germany
HDPE	High-density polyethylene
HP process	High-pressure process
IKV	Institute for Plastics Processing, Aachen, Germany
IML	In-mold labeling
IP	Instrument panel
ISO	International Standards Organization
LDPE	Low-density polyethylene
LGF	Long glass fibers
LLDPE	Linear low-density polyethylene

Abbreviation	Definition
LP process	Low-pressure process
MFI	Melt flow index
MFR	Melt flow rate
MIT	Massachusetts Institute of Technology, Boston, USA
OEM	Original equipment manufacturer
PBT	Polybutylene terephthalate
PET	Polyethylene terephthalate
PiAE	Plastics in Automotive Engineering; VDI Congress
PP	Polypropylene
pVT	Pressure–volume–temperature behavior
SEM	Scanning electron microscope
SCF	Supercritical fluid
SPC	Storage programmable control
TFIM	Thermoplastic foam injection molding (see TSG)
TPE	Thermoplastic elastomer
TPU	Thermoplastic polyurethane
TSG	Thermoplastic foam injection molding
UN	United Nations
VCI	Verband der chemischen Industrie (German Chemical Industry Association), Frankfurt am Main, Germany
VDI	Verein Deutscher Ingenieure (The Association of German Engineers), Düsseldorf, Germany

Contents

Preface	V
Foreword	VII
The Authors	IX
Glossary of Abbreviations	XI
Introduction	XIX
1 Importance of Foam Injection Molding for Industrial Lightweight Design	1
2 Foam Injection Molding and Its Different Process Variants	9
2.1 Chemical versus Physical Blowing Agents	10
2.1.1 Chemical Blowing Agents	10
2.1.2 Physical Blowing Agents	14
2.2 Processes	15
2.2.1 Low-Pressure Injection Molding Process	15
2.2.2 High-Pressure Process	16
2.2.3 Multi-Component Foam Molding (Sandwich Molding)	17
2.2.4 Foaming with Physical Blowing Agents	19
2.2.4.1 Introduction of the Blowing Fluid in the Area of the Screw	19
2.2.4.2 Injection of the Blowing Fluid via an Auxiliary Unit	20

2.2.4.3	Injection of the Blowing Fluid via an Injection Nozzle ...	22
2.2.4.4	Injection of the Blowing Fluid via the Screw	22
2.2.4.5	Introducing the Blowing Fluid into the Sprue System of the Injection Mold	23
2.2.4.6	Introduction of the Blowing Fluid in the Area of the Hopper	24
2.2.4.7	Pre-Loading Processes	25
3	Definition and Characteristics of Physical Foam Injection Molding	31
3.1	Properties of TSG Structural Foams	32
3.1.1	Weight Reduction	33
3.1.2	Sink Marks	33
3.1.3	Part Warpage	34
3.1.4	Shrinkage Behavior	35
3.1.5	Mechanical Properties	35
3.1.6	Insulation Behavior against Temperature Gradients	36
3.1.7	Insulation Behavior against Sound	37
3.1.8	Degassing	38
3.1.9	Surfaces	38
3.2	Manufacturing Process of Structural Foams	39
3.2.1	Mass Transfer and Mixing of the Blowing Agent in the Matrix Polymer	40
3.2.2	Loading and Compounding of the Single-Phase Mixture in the Plasticizing Unit	42
3.2.3	Foaming and Fixing of the Component in the Mold Cavity	43
3.3	Correlation of the Morphology of the Component Structure with the Process Parameters	44
3.4	Influence of Process Parameters on Component Properties	45
3.4.1	Influence of the Melt Temperature	45
3.4.2	Influence of the Injection Speed	46
3.4.3	Influence of the Mold Temperature	47
3.4.4	Influence of Underdosing in Case of Partial Filling of the Cavity	48
3.5	Measures to Improve the Surface Finish	48
3.5.1	Technologies for Mold Temperature Control	49

3.5.2	Tooling Concepts	52
3.5.3	Surface Coatings of the Cavities	53
3.5.4	Sandwich Foam Injection Molding	54
4	Design Guidelines for Foamed Components	57
4.1	Weight Reduction by Foaming	57
4.2	Basic Design Optimization	60
4.3	Wall Thickness	61
4.4	Outlook for Component Design	62
4.5	Hints for the Mold Design	67
4.5.1	Venting Recommendations	67
4.5.2	Design of Sprue Rod and Manifold	68
4.5.3	Hot Runner Systems	70
4.5.4	Mold Temperature Control	71
4.6	Filling Analysis	71
4.7	Design Guidelines for Foam Injection Molding	72
4.7.1	Three-Phase Model in the Practical Implementation of Design for TSG Components	77
4.7.2	“Design for Function” – A Plea	81
5	Process Simulation	83
5.1	Software Systems	83
5.2	Simulation of Viscosity Reduction / Cell Nucleation and Cell Growth	84
5.2.1	Viscosity Reduction	84
5.2.2	Cell Nucleation and Cell Growth	86
5.3	Meshing / Model Layout	93
5.4	Define Process Parameters for Simulation	96
5.5	Results and Interpretation	99
6	Polymers for Foam Injection Molding	111
6.1	Introduction	111
6.2	Test Specimen	112
6.3	Influence of the Integral Foam Structure on the Characteristic Values ...	113
6.4	Specific Modification of the Properties of the Foam Polymers	116
6.5	Polymers	117
6.6	Polypropylene (PP)	120
6.7	Polyamides (PA)	120

6.8	Polyoxymethylene (POM)	120
6.9	Polycarbonate (PC)	121
6.10	Nucleating Agents	121
6.10.1	Organic Fillers	122
6.10.2	Inorganic Fillers	122
6.10.3	Fibers	122
7	Engineering Fundamentals of the Foam Injection Molding Machine	123
7.1	Introduction	123
7.2	Clamping Unit	124
7.3	Injection and Plasticizing Unit	127
7.4	Special Equipment	134
7.5	Gas Dosing Station	137
7.6	The Ideal Foam Injection Molding Machine	139
8	Mold Design for Foam Injection Molding	141
8.1	Tooling Basics	141
8.1.1	Gating	141
8.1.1.1	Process Analysis at the Gating Area	142
8.1.1.2	Process Analysis behind the Gating Area	143
8.1.2	Filling Process	143
8.1.3	Venting	144
8.1.4	Mold Temperature Control	144
8.1.5	Ejection	146
8.1.6	Monitoring	146
8.1.7	Mold Surface and Coating	146
8.1.8	Mold and Influence of the Melt	147
8.2	TSG Processes – Application and Mold Design	147
8.2.1	Low-Pressure TSG	148
8.2.2	High-Pressure TSG with Opening Stroke	148
8.2.3	Application Example 1: Soft-Touch Surfaces with High-Pressure TSG	150
8.2.4	Application Example 2: High-Pressure TSG for Flat Visible Components	153
8.2.5	Application Example 3: Low-Pressure TSG	154

9	Application Examples from the Automotive Sector	155
9.1	Introduction	155
9.2	Lock Housing	158
9.3	Door Sill	160
9.4	Headlight Housing	161
9.5	Rear Spoiler Lower Shell	162
9.6	Exterior Mirror Holder	163
9.7	Handle Trim IML	164
9.8	Instrument Panel Carrier	166
9.9	Door Trim Panel and Map Case	170
9.10	Handle Lever for Steering Column Adjustment	171
9.11	Stop Damper	174
10	Application Examples from the Field of Electronic Components	177
11	Application Examples from the Household Sector	183
11.1	Economic Consideration of Foamed Thermoplastic Components	183
11.2	Floor Group White Goods	187
11.3	Base Plate for Power Tools	189
11.4	Irrigation Valve	190
11.5	Running Shoe Sole	191
12	Applications Examples from the Packaging Sector	193
12.1	Margarine Tub	195
12.2	200 ml Yogurt Cup and 900 ml Cup	197
12.3	Recommendations for the Use of Foaming Processes in Thin-Wall Packaging	199
12.4	Pallets	200
13	Application Examples from the Field of Medical Technology	205
14	Outlook	209
	Index	211

Introduction

Hartmut Traut and Hans Wobbe

It is as a result of the lightweight design megatrend that foam injection molding has developed into the most important special process alongside conventional compact injection molding. However, the actual development of thermoplastic molded parts by injection molding began already in the 1950s. Experienced machine operators reduced sink marks on the molded parts by adding small amounts of baking powder to the granules. This was the beginning of chemical foaming, but with the focus on eliminating sink marks – the production of complete foamed molded parts was not yet envisaged at that time.

Before we continue with the text, a quick note on terminology: The authors have chosen to use the abbreviation “TSG” for “thermoplastic foam injection molding” throughout this book; this corresponds to the German term for the method, but is quite widely used, partly because it is the standard abbreviation applied by the VDI (Association of German Engineers). However, readers may find the abbreviation “TFIM” is sometimes used in other sources.

Thermoplastic foam injection molding (TSG) then received a major boost in the 1990s from the work carried out at MIT (Massachusetts Institute of Technology) in Boston on microcellular plastic foams using direct gassing”. Compared to the chemical blowing agents used until then, direct gassing involves inert gases such as nitrogen or carbon dioxide. It is therefore also referred to as physical foaming. Here, for example, the nitrogen is metered under pressure into the plasticizing area, where the polymer is already fully melted. It plays a special role here that the gas is mixed into the molten plastic in a supercritical state. Thus, a single-phase mixture can be achieved, and with excellent homogeneity.

After some time, which was also characterized by start-up difficulties, the “special TSG process” then established itself as a largely “normal” processing method. In addi-

tion, the initiators often come directly from the molders, who are aware not only of the material savings but also of the advantages in the production of finished parts.

Lock housings in the passenger car sector are a very good example of this. The requirements of the finished part are characterized by tight tolerances, a surface without visible sink marks, and material savings. Without the TSG process, these are not achievable! In addition to the lightweight design mentioned at the beginning, the trend toward large-area, thin-walled components also plays into the cards of foam injection molding. Today, many of the required part dimensions in terms of warpage cannot be produced without TSG.

The well-known disadvantages of foam injection molding, i.e. a surface of the molded part that is not free of streaks, have now been solved. High-gloss surfaces can be achieved by rapidly variable mold temperature control. There are also ceramic-based coatings on the market which – applied in the cavity – produce a “variothermic effect”. Component surfaces with textures and grains can already be produced without the additional processes mentioned.

This means that there are no longer any limits to the TSG process – the way is now clear for it to become a standard process alongside compact injection molding. The relevant committees have also recognized this and have developed a standard for foamed components as a VDI guideline, which was published in May 2023 after several years of work.

1

Importance of Foam Injection Molding for Industrial Lightweight Design

As already mentioned in the introduction, the actual breakthrough of foam injection molding did not take place until the 1990s, driven by the lightweight design trend in the automotive industry. Developments at that time, such as the lock housing already cited or headlight housings, are now standard technology. Not only that, but today all these components in automotive engineering are actually foamed. Foam injection molding has replaced compact injection molding as the standard process for many components in the automotive industry! The technology curve in Figure 1.1 clearly shows the “development history”.

The abscissa of the graph in Figure 1.1 depicts the technology life status of the components over time, starting from the development status to the state of the art. The ordinate shows the corresponding manufacturing process, partly named with the material component to be processed (MuCell® with TPU), partly as a combination technology, such as MuCell® with film back injection.

The superficial explanation for the definitive breakthrough of foam injection molding is that foaming the plastic reduces the weight of the material for the same part geometry. At the same time, the manufacturer saves on the material input of the polymer during the primary shaping process. A closer, more intensive look at the process steps, as we will explain in detail in Chapter 3 “*Definition and Characteristics of Physical Foam Injection Molding*”, also reveals a considerable range of additional advantages. In many cases, it is precisely these advantages that make it easy for the user to decide whether a component should be produced by compact injection molding or whether it is better to produce it as a foamed part.


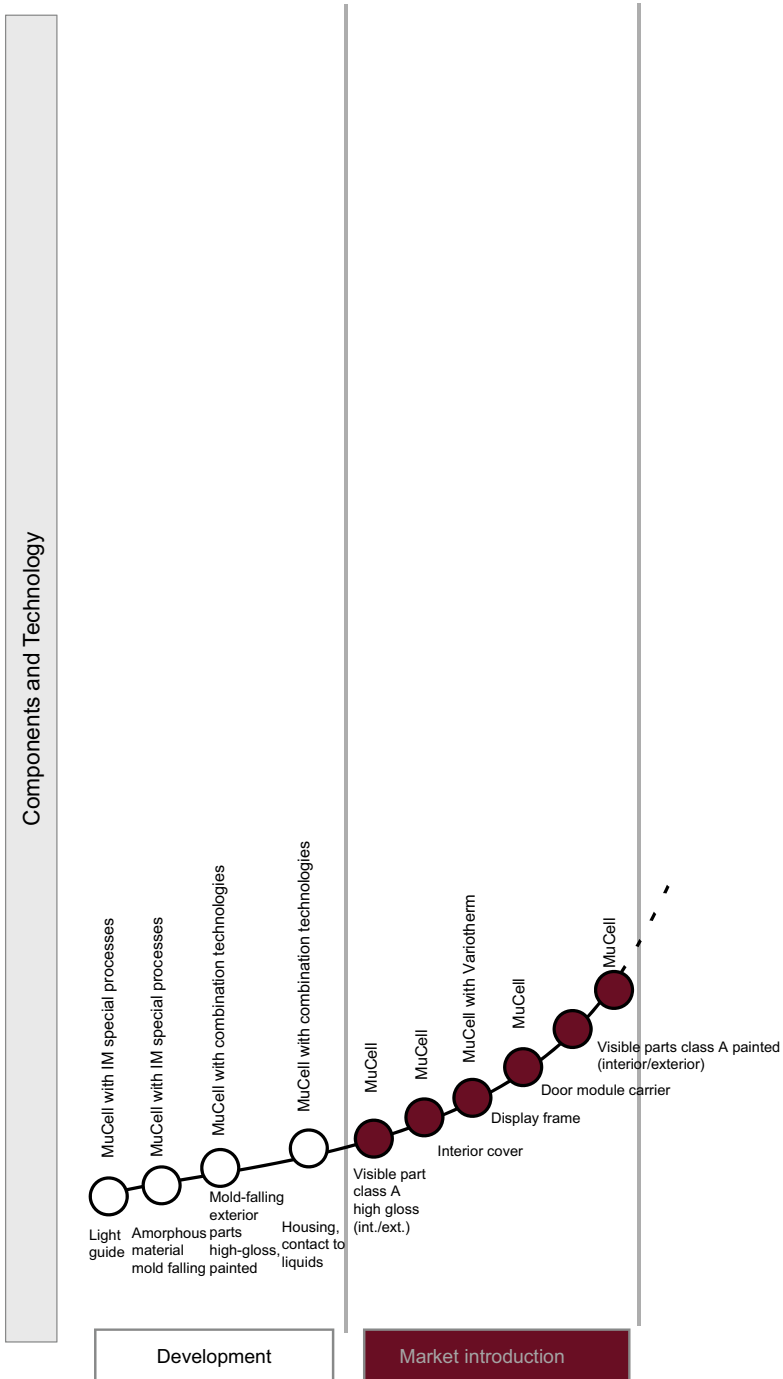


Figure 1.1 Development curve of MuCell® for automotive applications [Source: Trexel GmbH]

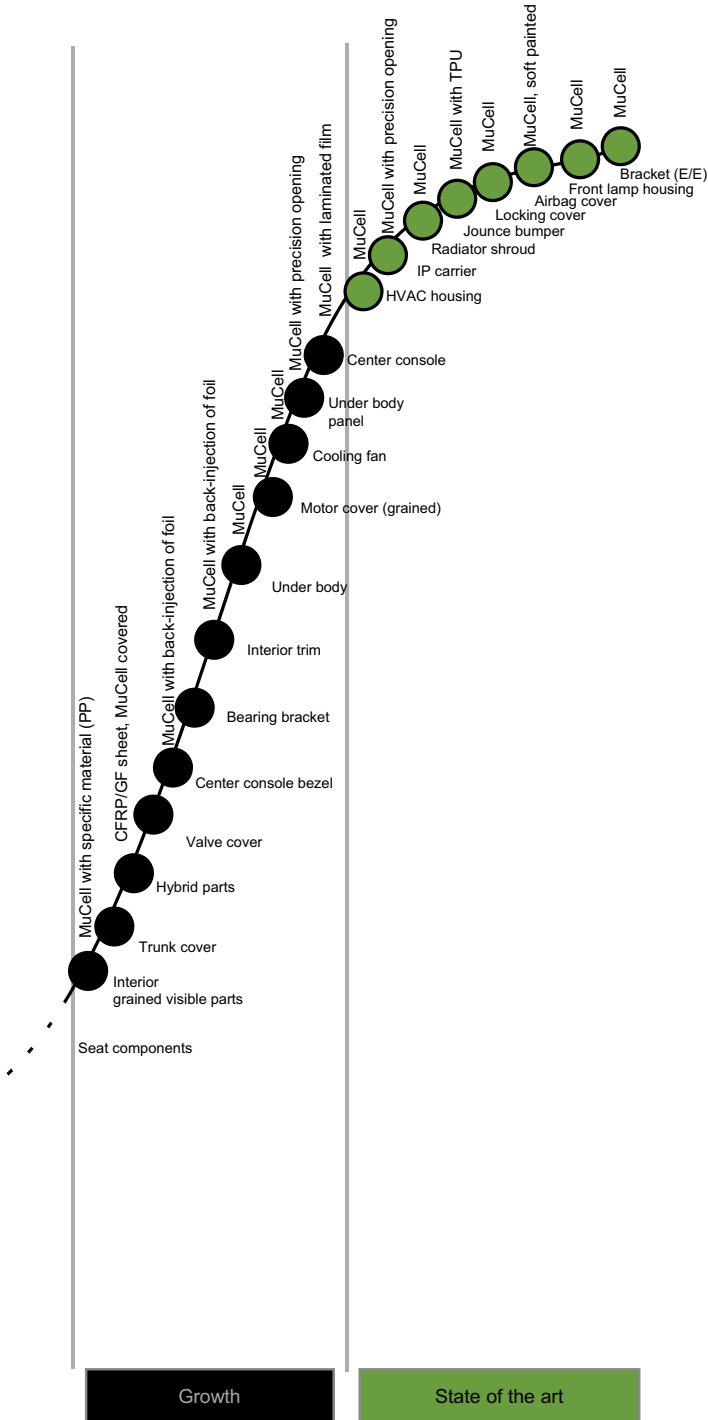

These advantages of the TSG process are, in addition to the weight savings already mentioned:

- A reduction in sink marks (usually to zero).
- Hardly perceptible warpage of the components.
- Production increases due to cycle time reduction.
- Possibility of thin-walled lightweight design (see in detail Chapter 4 “*Design Guidelines for Foamed Components*”).

Figure 1.2 gives an exemplary overview of this, based on four reference parts from the automotive industry. To explain Figure 1.2, let us take the “oil pan” as seen in the third row: Here, the second column in the figure indicates the reference data in each case, i.e. the part weight, the equipment investment including tooling, the productivity, the resulting part costs, and the mechanical part properties required for the critical points. The reference is, of course, the classically compact injection molded part.

In the third column “Injection Molding with MuCell®”, the first results can now be discussed comparatively:

- The component weight decreases, corresponding to the degree of foaming.
- The investment increases concerning the injection molding machine. A gas dosing station is also required.
- Productivity increases significantly, mainly due to faster production cycles.
- The costs related to the component decrease, since the reduced material input and the increased productivity offset the higher equipment investment.
- The necessary mechanical properties at the critical points of the component remain intact.

It becomes even more interesting for every user as soon as the component design has been carried out as a lightweight design in compliance with the TSG design guidelines (for details, see Chapter 4). For this purpose, we will now discuss the representation in the fourth column of Figure 1.2 “Injection Molding + MuCell® + Lightweight Design”:

- The component weight of the oil pan is further reduced by approx. –10%. This is due to the lightweight design suitable for the TSG process.
- The equipment investment increases slightly, also compared to the third column, because the tooling costs for such a component are slightly higher. Otherwise, there are no changes to what has already been stated.
- Productivity continues to increase! We achieve shorter cooling times due to thinner components as well as even faster cycles of the production line.
- The costs related to the component are reduced once again, now by a good 10% in total.
- There is no change in the mechanical properties of the critical areas of strength. The values are comparable with those of compact injection molding.

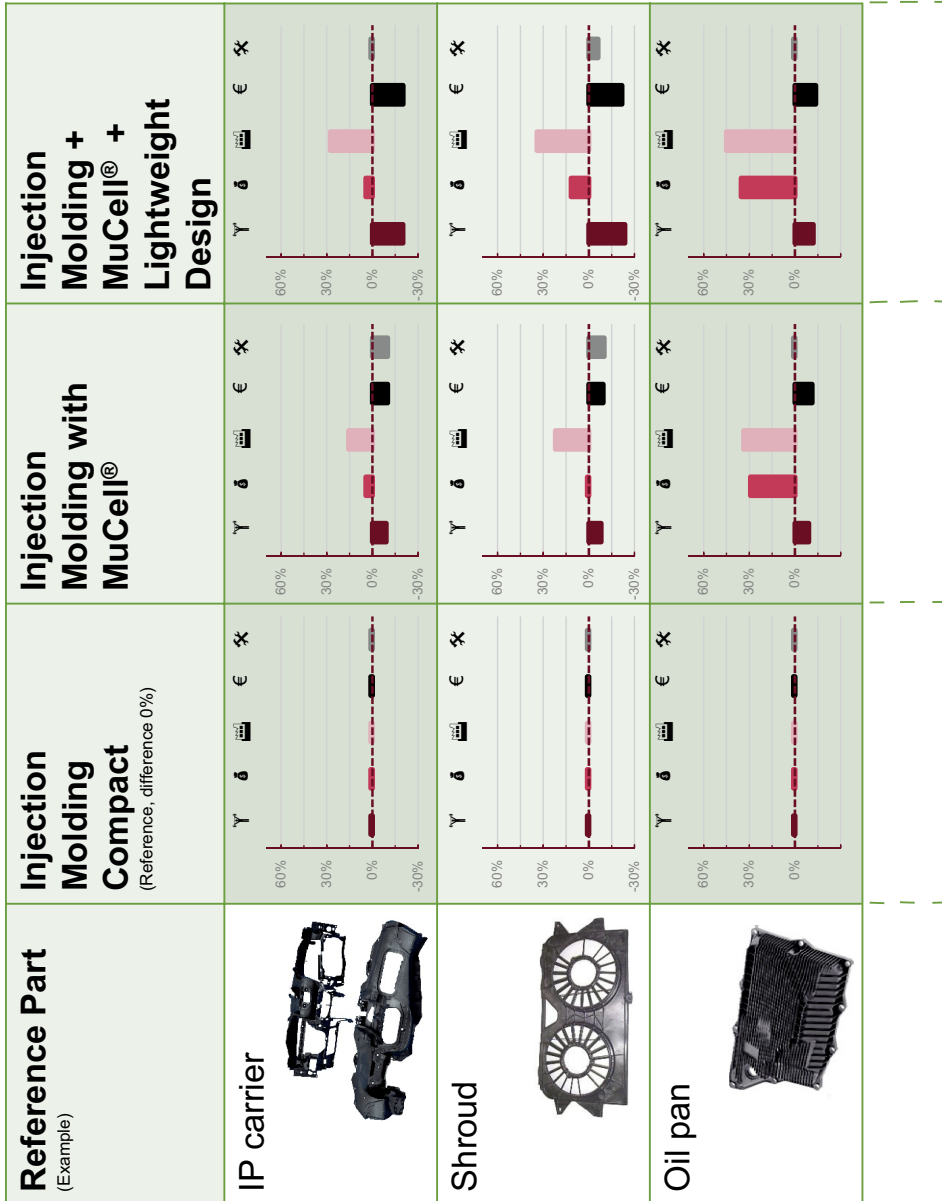

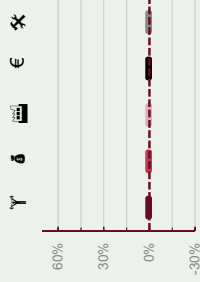
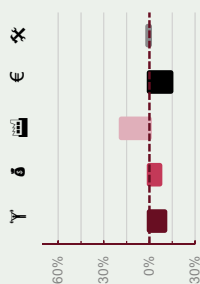
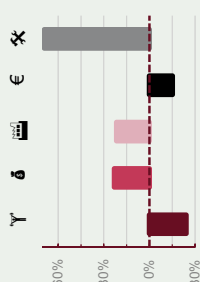






Figure 1.2 Advantages of exemplary TSG components [Source: Trexel GmbH]

<p>Underbody (draft with mold opening stroke)</p> 			
<p>Remark</p>	<p>Molded part in conventional design:</p> <ul style="list-style-type: none"> - Rib / Wall ratio - Flow length - Injected from thick to thin 	<p>Molded part in conventional design foamed with MuCell:</p> <ul style="list-style-type: none"> - Less weight due to foamed structure - Production without holding pressure 	<p>MuCell enables free part design adapted to topographic load :</p> <ul style="list-style-type: none"> - Lightweight design - Reduced wall thickness - Thick parts with lower density - Increase in output  

- γ = Weight
- δ = Investment
- π = Productivity
- ϵ = Part costs ¹⁾
- κ = Crucial mechanical property

¹⁾ Calculation based on a volume model with 300.000 cars per year

So much for the advantages of TSG components, which we experience every day in mass production. We do not wish to go into further detail here on another macroeconomic advantage that is repeatedly mentioned, namely the CO₂ footprint in production – we will discuss this issue in more detail using an example from the automotive sector in Section 9.1. However, it is clear to everyone that TSG offers considerable advantages here compared to traditional compact injection molding: Material costs decrease, production efficiency increases, and the lightweight part requires less kinetic energy in its “later life cycle”.

Let us return to Figure 1.1 in this chapter. In particular, the “Development” section should clearly show here that TSG by itself is a technology that today can be described as a standard process. In addition, however, every expert is aware that TSG in conjunction or in combination with another process offers an enormously large, yet unexploited potential for new processes.

Last but not least, we would like to point out that in most chapters of this book we list tips and suggestions in prominent type under the motto “Less is more”. In each case, the labeling begins with the symbol of a scale and points out advantages and interesting aspects of foam injection molding.



We hope that this will motivate as many readers as possible to take a closer look at this innovative process, so that further development and research will be carried out in this area in the future – because, as already mentioned above, this technology still holds some unrealized potential.

Index

Symbols

3D effect 196

A

additives 13
adsorption 40
alternating temperature control 162
aluminum mold 164
aluminum tools 147
AquaCell® process 27
autoclave 25*f.*

B

barrier coating 196
barrier labeling 196
base wall thickness 170
bending test 112
biocompatibility 206
blowing agent 9
– supercritical 84
blowing agent metering station 19
blowing agents
– chemical 10
– endothermic 12
– exothermic 12
– physical 14

blowing fluid
– supercritical 19
boundary layer mesh 93
boundary layer thickness 35, 45, 113
bubble density 89
bubble diameter 103
bubble growth 84
– speed 88
bubble structure
– homogeneity 130

C

Cadmould 83, 85, 91
carbon dioxide 15
cavity 72
cavity pressure 179
cell coalescence 44
cell density 12, 15, 104
cell growth 44, 73, 83
Cellmould® process 20, 133
cell nucleation 12
cell orientation 31
characteristic values 111
clamp force 102, 125, 188
Class A surfaces 147
CO₂ footprint 156, 162, 194, 209
CO₂ sticker 155

cold runner sprue 68
 combination technology 1
 compact injection molding 47, 52, 72,
 125
 component density 35, 113
 component design 4, 84
 – topological 157, 160, 166
 component quality 158
 component strength 122
 composites 184
 cooling 71
 cooling rate 58
 cooling times 4
 copolymers 117
 core back 90
 corrosion 13
 creep behavior 113
 creep rate 116
 cycle time 16*f.*, 61
 cycle time reduction 179

D

damping properties 174
 degassing screw 128
 degradation rate 207
 density distribution 104*f.*, 149
 density reduction 57, 105
 design freedom 197
 design guide 57
 diffusion 42
 dimensional accuracy 162, 180
 dimensional stability 180, 198
 DIN 16742 139
 distortion in the component 189
 Dolphin process 168
 dry ice 15

E

ejectors 146
 electrical components 177
 elongation at break 114
 equipment investment 4

ErgoCell® process 20
 expansion 152

F

fasteners 63
 FEM calculation 174
 fillers 62, 87, 120*f.*
 filling of the molded part
 – balanced 200
 filling pressure 79
 flame protection 177
 flow aid 199
 flow factor 58, 73
 flow fronts 63
 flow path 173
 flow path end 99
 – thin sections 100
 flow path/wall thickness ratio 58, 76,
 143, 174
 foaming process
 – simulation 93
 foam morphology 44
 foam structure 113, 130
 – homogeneous 149
 – microcellular 200

G

gas diffusion equation 88
 gas dosing station 4, 137
 gas metering station 15, 24
 gas yield 12
 gate bushing 145
 gating
 – cascaded 143
 gating point 58, 74
 gating systems 143
 glass fiber content 108
 glass fibers 120
 glass transition temperature 85
 greenhouse gas 194

H

high-pressure process 16
holding pressure 69, 97, 147
– point for switching 97
homopolymers 117
hot runner 94
hot runner nozzle 93, 142
hot runner systems 70
 housings 178

I

IML (in-mold labeling) applications 196
impact resistance 202
impact test 112, 116
implant
– foamed 205
inert gases 14, 31
injection molding machine
– tie-bar-less 126
injection molding parameters 96
injection pressure 102, 195
injection speed 47, 83, 135
injection unit 127
in-mold process 38
integral foam 32, 35

L

lightweight design 4, 155
lightweight properties
– shock-absorbing 191
lip geometry
– asymmetric 199
locking ring 134
low-pressure process 15, 124

M

manufacturing costs 183
masterbatch 11, 31
– decomposition process 31
matrix polymer 39, 121

MeltFlipper® 69
melt strength 151
melt temperature 45 *f.*
metering behavior 130
metering device
– external 10
microspheres
– expandable 28
minimization of distortion 162
mixing geometry 131
mixing zone
– geometry 42
mold
– expandable 16
mold cavity pressure 48
mold clamping plate 128
mold clamping surface 139
mold coatings 146
Moldex3D 83, 85, 87, 98, 106
Moldflow 83, 90
mold geometry 17
mold temperature 144
mold wall temperature 47
monomers 117
MuCell® process 19, 63, 83, 132
multi-cavity molds 142
multi-component foam molding
18

N

needle shut-off nozzle 70, 134
needle valve nozzle 14, 22
non-return valve 19, 134
nucleating agents 13
– heterogeneous 120
nucleation 83, 86
– heterogeneous 43, 121
– homogeneous 43
nucleation rate 86

O

OptiFoam® process 22

P

part design 61
 – topological 180
 part geometry 1, 95
 Physical Foaming Screw 134
 plastic implants 205
 plasticizing unit 95, 127, 142
 plastic packaging 193
 plastics
 – bio-based 193
 – functionalized 207
 Plastinum® process 25
 plate clamping dimension 125
 platen deflection 124
 polyamide 120, 154
 polymer alloy 117
 polymer blend 117
 polymers
 – foamed 111
 – processing temperature 13
 polypropylene 120, 199*f.*
 post blow 71, 199
 pre-drying 121
 pre-loading process 25
 pressure chamber lock 133
 primary shaping process 1
 production costs 184
 ProFoam® process 24, 132

R

recycling 209
 recycling systems 194
 reinforcements 122
 rib design 61

S

sandwich foam injection molding 54
 screw boss 65, 67
 screw dome 166
 screw geometry 128, 134
 shrinkage 35
 – volumetric 107
 shrinkage behavior 18
 silver streaks 28, 38, 48, 143
 single-phase mixture 39, 42, 128
 sink marks 33, 57, 107, 162, 202
 skin-to-core ratio 18
 SmartFoam® process 23
 soft-touch surface 168
 sorption 42
 sound insulation 37
 sprue design 69
 stack mold 170
 standard mixing screw 123
 starting gas concentration 97
 stiffness 150
 structural foams 31
 supercritical range 41
 surface defects 146
 surface layer thickness 33
 surface tension 88
 switchover point 101

T

tandem and stack mold 71
 temperature control
 – alternating 49
 – dynamic 53
 tensile test 112
 thermal insulation 37
 thin-walled parts 97
 thin-wall packaging 199
 thin-wall technology 184
 three-plate mold 69
 topological design 82
 TPE surfaces 150
 TPU 191, 206

Trexel

– guidelines 83

TSG in the clean room 205

TSG process

– high-pressure 150

– standard 126, 139

– with opening movement 126

U

UCC process 14, 16

UL rule 177

V

VDI Guideline 2021 139, 192

venting 59, 63, 67, 96, 144

viscosity reduction 73, 84

visible components 151

voids 143

W

wall thickness 61*f.*, 173, 184

– nominal 62

warpage 34

weight reduction 33, 101, 159, 182, 184

– by density reduction 195

weld lines 72, 83, 100, 142